

PAR 36 EXTENDED AND FLAT LENS STROBE/HALOGEN LIGHT

**E3EDSBD(x), E3EDSBQ(x) (see Weather Pack Instructions), E3FDSBD(x) (STROBE)
AND E3EDHBB(x), E3FDHBB(x) (HALOGEN)**

NOTE

The Light housing must be mounted in upright position with the mounting bracket on the bottom. If light is mounted by hanging bracket on top, wire/cable exit holes must be sealed and a new 1/8" hole drilled in bottom back of light housing.

STROBE INSTALLATION

1. Install the proper 3 Position Amp Connector Housing onto the terminated ends of the Strobe Cable.

NOTE

WIRING CODE MUST BE OBSERVED WHEN INSERTING PINS INTO AMP CONNECTOR HOUSING. Refer to Figure A.

2. Mount the "U" Bracket to the Light Housing and then to the vehicle using the supplied parts kit.
3. Route the StrobeCable to the Strobe Power Supply.

HALOGEN INSTALLATION

1. Mount the "U" Bracket to the Light Housing and then to the vehicle using the supplied parts kit.
2. Connect the extending wires to the light. Red wire is positive and the black wire is negative.

WARRANTY

SoundOff Signal warrants the Par 36 Extended and Flat Lens Strobe/Halogen Light for 1 (one) full year from the date of purchase to the original purchaser against any manufacturer defects or workmanship. This warranty applies only to units install according to manufacturers Installation Instructions and operated within the units specifications.

Warranty is void if the unit was installed incorrectly or maliciously damaged. All warranty claims must be accompanied by a dated proof of purchase.

SoundOff Signal retains the right to be the sole mediator of what constitutes defects in performance or manufacturing.

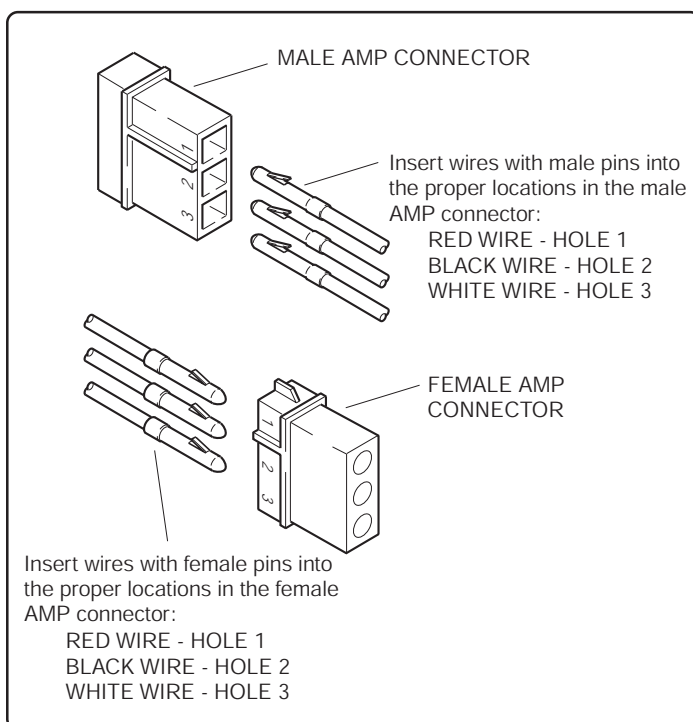


Figure A