



3900 Central Parkway
 Hudsonville, MI 49426
 toll free 800.338.7337
 office 616.896.7100
 techsupport@soundoffsignal.com
 www.soundoffsignal.com

WARNING: Warning devices are strictly regulated and governed by Federal, State and Municipal ordinances. These devices shall be used ONLY on approved vehicles. It is the sole responsibility of the user of these devices to ensure compliance.

MOUNTING INSTRUCTIONS

Before starting the installation make certain you have the correct bracket (sold separately except for the universal bracket which is included) for your application.

Install the UltraLITE by following the assembly instructions provided with the brackets and check for security.


Important: DO NOT over tighten mounting screws or nuts. This could cause permanent damage to the light or bracket. Use appropriate hardware for mounting.

PATTERN SELECTION

1. Connect black wire to ground.
2. Connect red wire to +12Vdc
3. Apply +12Vdc to white wire for less than one second (momentary) to move forward one pattern.
4. Apply +12Vdc to white wire for one second (until the lights dim) to move backwards one pattern
5. Apply +12Vdc to white wire for more than two seconds (until the lights turn off) to turn off the UltraLITE.
6. To turn the unit back on, apply +12Vdc to the white wire momentarily.

⚠ WARNING

This product contains high intensity LED devices. To prevent eye damage, DO NOT stare into light beam at close range.

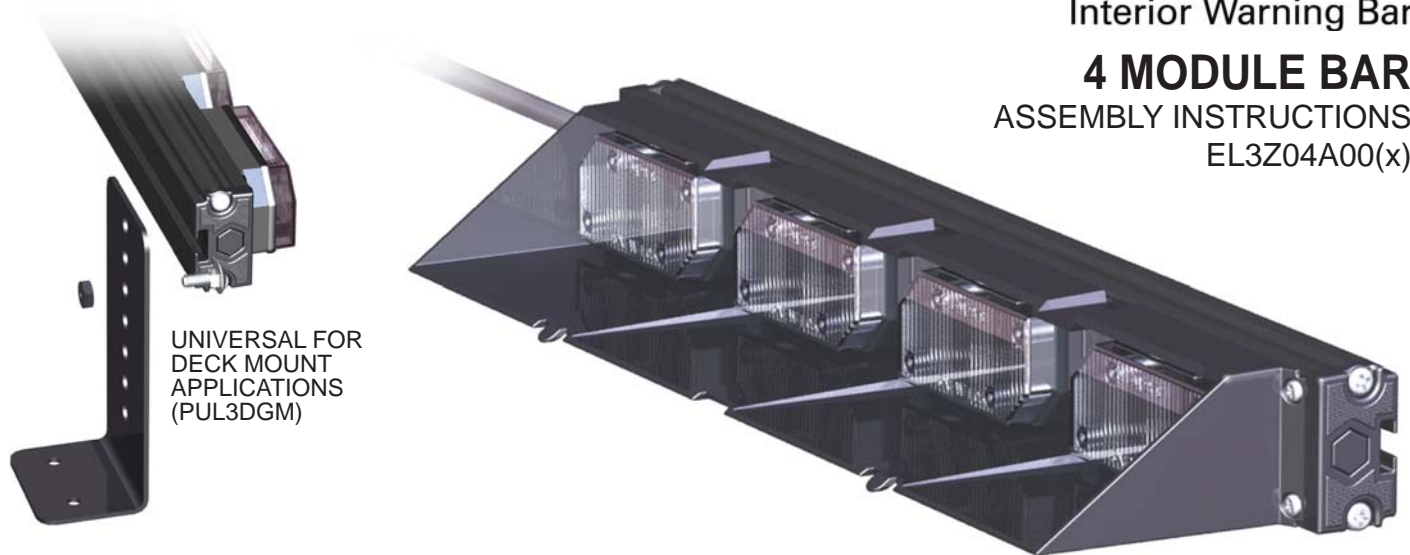

UNIVERSAL FOR DECK MOUNT APPLICATIONS (PUL3DGM)

UltraLITE

Interior Warning Bar 4 MODULE BAR ASSEMBLY INSTRUCTIONS EL3Z04A00(x)

FLASH PATTERNS for 4 MODULE UltraLITE

#	Pattern Name	
1	Quint Flash	Alternating
2	Warp Flash	Alternating
3	Inter-cycle Flash	Alternating
4	Double Flash	Alternating
5	Quad Flash	Alternating
6	3 Flashes / Second	Alternating
7	3 Flashes / Second	Simultaneous
8	Q-Switch	Alternating
9	Driver Side	Steady Burn
	Passenger Side	Road Runner Flash
10	Driver Side	Steady Burn
	Passenger Side	Quint Flash
11	E-Pattern Single Flash	Alternating
12	E-Pattern Double Flash	Alternating
13	E-Pattern Single Flash	Simultaneous
14	E-Pattern Double Flash	Simultaneous
15	Q-Switch	Every other
16	LiteRyder	Slow Sweep
17	LiteRyder 2	Fast Sweep
18	Progressive	Alternating
19	Center	Steady Burn
	Ends	RoadRunner Flash - Alternating
20	Center	Steady Burn
	Ends	Intercycle - Alternating
21	Center	Steady Burn
	Ends	Q-Switch - Alternating

WIRE HOOK-UP TABLE	
Wire Color	Connect to:
Red	+12Vdc
Black	Ground (-)
White	Pattern Select

Input Voltage: 10-16Vdc
 Current: 2 Amps Maximum

