



3900 Central Parkway
Hudsonville, MI 49426
toll free 800.338.7337
office 616.896.7100

techsupport@soundoffsignal.com
www.soundoffsignal.com

IMPALA FLASHBACK (ETFBIMP0)

For 2001 and newer vehicles

The Flasher mounts to a flat area of the inner trunk support directly below the passenger side trunk lid hinge base.

Mark and drill the tow mounting holes (3/16") in the inner trunk support using the flasher as a template.

Install the flasher using two 3/16" pop rivets.


Locate the wire harness that has the tow matching plugs in it.

Pull the wire harness connector apart and connect to the mating plug in the flasher.

There should be a Lt. Blue wire located under the glove compartment. This is the flasher on/off wire. Connect the Lt. Blue wire to a switch. Connect the other end of the switch to a source of +12Vdc.


Note: Red/Black Wire is an Auxiliary Output to control Package Tray Lights. Refer to Figure below.

FRONT OF VEHICLE REAR OF VEHICLE

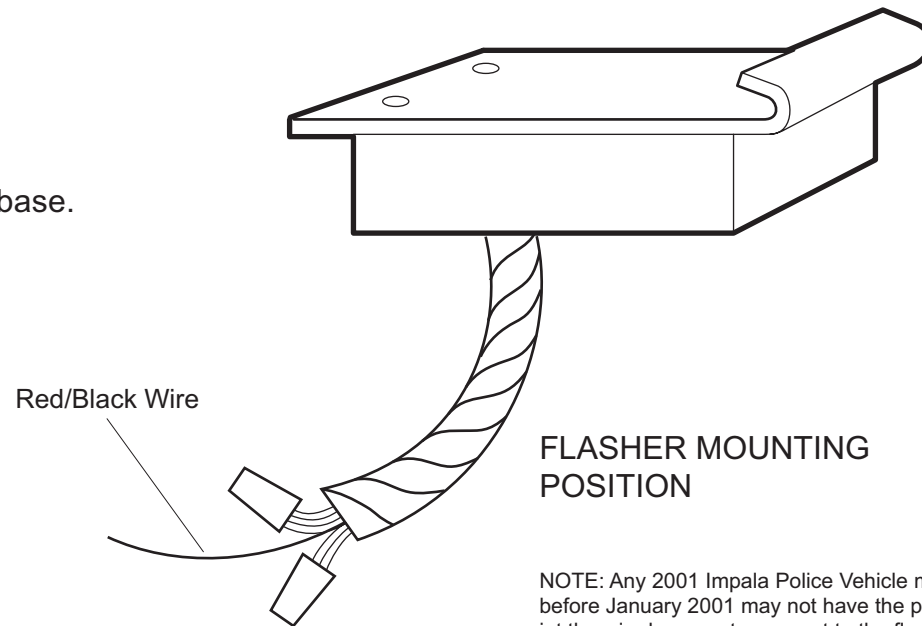

FLASHER MOUNTING POSITION

NOTE: Any 2001 Impala Police Vehicle manufactured before January 2001 may not have the proper connectors in the wire harness to connect to the flasher. Please call SoundOff Signal for technical assistance.

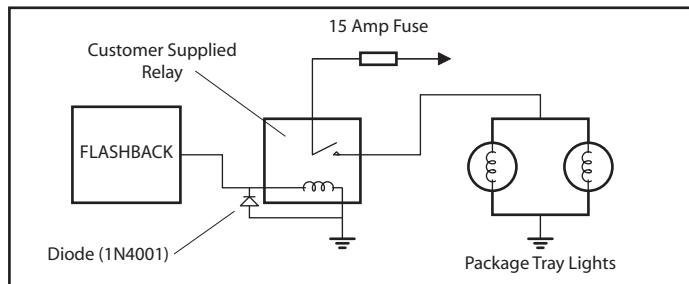

WARRANTY

SoundOff Signal warrants the ETFBIMP0 solid state electronic flasher system for 5 years from the date of purchase, to the original purchaser, against any manufacturer's defects or workmanship. This warranty applies only to units installed according to manufacturer's installation instructions and operating within the units specification. SoundOff Signal's obligation under this warranty is limited to repairing or exchanging the unit. SoundOff Signal will not be liable for any incidental or consequential damage. Warranty is void if the unit was misused, neglected, unauthorized alterations or repairs performed, improperly installed, or incorrectly wired. SoundOff Signal retains the right to be sole mediator of what constitutes defects in performance or manufacturing.