

PAR 36

by SoundOff Signal

Gen 3


PAR 36 LED Work Lights (10-16 Vdc)

Flood Pattern #EWLB(yyyy)DBDFØW

Spot Pattern #EWLB(yyyy)DBDSØW


Trapezoid Pattern #EWLB(yyyy)DBDTØW

(yyyy) = Lumen Output: Ø35Ø, Ø50Ø, 100Ø or 140Ø

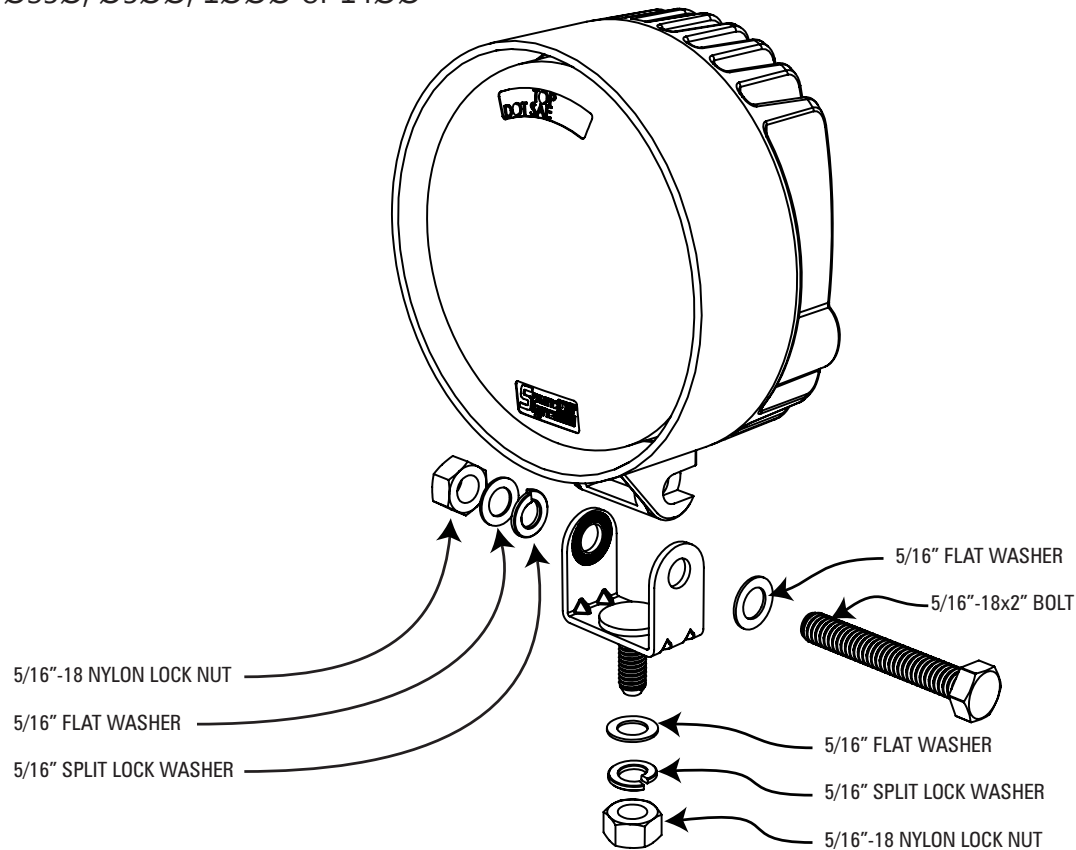

ELECTRICAL CONNECTIONS:

See diagram below for required electrical connections. Connect the RED wire to +10-16Vdc through a customer supplied 5A fuse and switch. Connect the BLACK wire to a reliable ground.

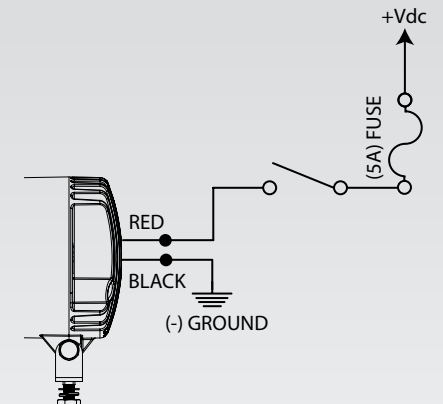

MECHANICAL ATTACHMENT:

Assemble Mounting bracket as shown in the diagram to the left. All bolts should be torqued to a maximum of 25 in-lbs.

WARNING

This product contains high intensity LED devices. To prevent eye damage, DO NOT stare into the light beam at close range.



To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product please visit our website at www.soundoffsignal.com and select the "Warranty & Returns" link along the left column of our home page. If you have questions regarding this product please contact Technical Services, Monday - Friday, 8 am to 5 pm at 1.800.338.7337, press #4 to skip the automated message.

Questions or comments that do not require immediate attention may be emailed to techsupport@soundoffsignal.com.

1.800.338.7337. / www.soundoffsignal.com / Thank you for trusting us with your safety!




PAR 36 LED Work Lights (10-16 Vdc)

Flood Pattern #EWLB(yyyy)DBDFØW

Spot Pattern #EWLB(yyyy)DBDSØW

Trapezoid Pattern #EWLB(yyyy)DBDTØW

(yyyy) = Lumen Output: Ø35Ø, Ø50Ø, 1Ø0Ø or 14ØØ

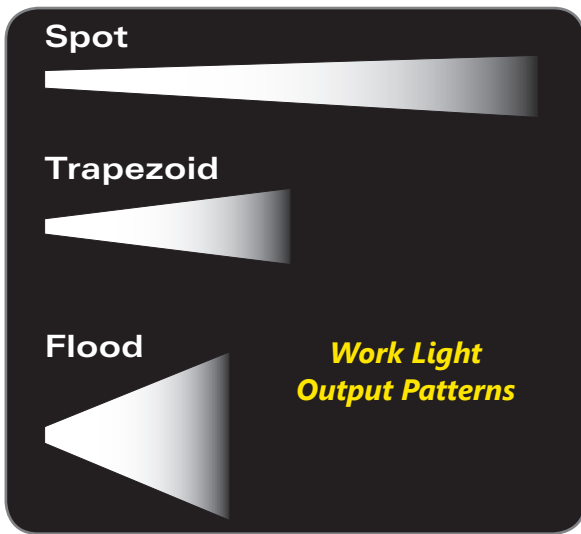

Tech Specs	PAR 36 350 Lumen	PAR 36 500 Lumen	PAR 36 1000 Lumen	PAR 36 1400 Lumen
Illumination Patterns:	Flood (40° Horiz. x 25° Vert.), Spot (10°) or Trapezoid (40° Horiz. x 15° Vert.)			
Color Temp.:	5700k			
Technology:	3 Gen3 LEDs	6 Gen3 LEDs	6 Gen3 LEDs	9 Gen3 LEDs
Mounting:	Surface Mount with provided U-bracket			
Input Voltage:	10 - 16 Vdc			
Current Draw:	0.6 amps @ 12.8 Vdc	1.0 amps @ 12.8 Vdc	1.6 amps @ 12.8 Vdc	2.5 amps @ 12.8 Vdc
Dimensions:	Diameter x Height x Depth 4.5" (10 cm) Diam. x 2.8" (64 mm) D / Overall Height: 5.7" (14 cm) incl. bracket			
Operating Temp.:	-40° to +65° C / -104° to +149° F			
Weight:	1.0 lb. / 0.45 kg			
Reverse Polarity:	Protected			
Load Dump:	Protected			



To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product please visit our website at www.soundoffsignal.com and select the "Warranty & Returns" link along the left column of our home page. If you have questions regarding this product please contact Technical Services, Monday - Friday, 8 am to 5 pm at 1.800.338.7337, press #4 to skip the automated message.

Questions or comments that do not require immediate attention may be emailed to techsupport@soundoffsignal.com.

1.800.338.7337. / www.soundoffsignal.com / Thank you for trusting us with your safety!