



## PMP4BZL01X

Bezel for mpower® 4" HD Lights

FIG. 1

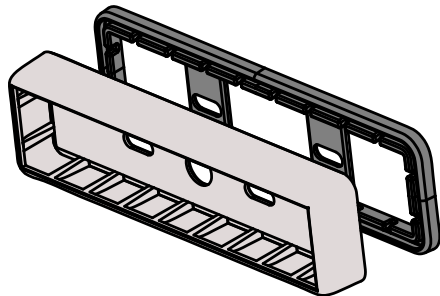


FIG. 2


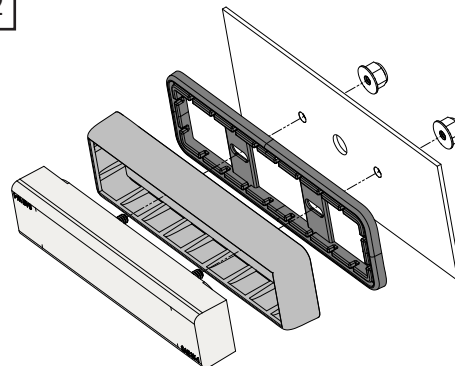


FIG. 3

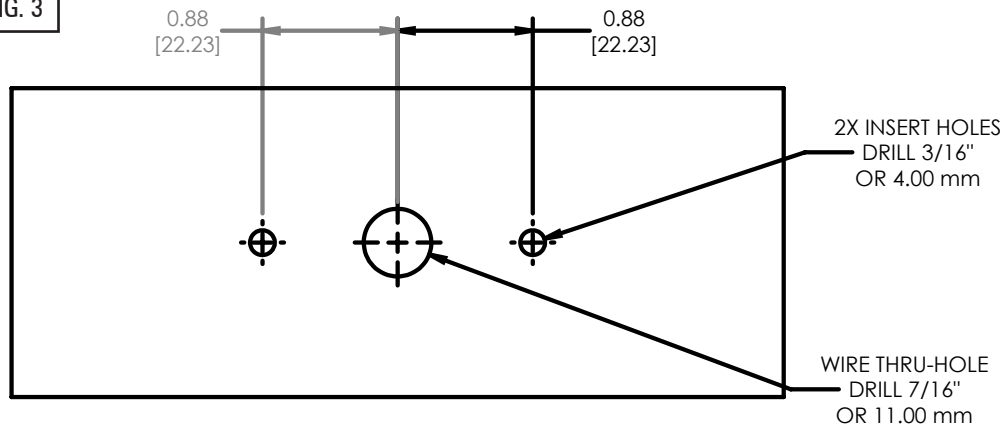

### NOTICE:

Installers and users must comply with all applicable federal, state and local laws regarding use and installation of warning devices.

*Improper use or installation may void warranty coverage.*

To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product, visit our website at [www.soundoffsignal.com/tech-services/returns/](http://www.soundoffsignal.com/tech-services/returns/). If you have questions regarding this product, contact **Technical Services**, Monday - Friday, 8 a.m. to 5 p.m. or after hours 5 p.m. to 8 p.m. ET at **1.800.338.7337** (press #4).

Questions or comments that do not require immediate attention may be emailed to [techservices@soundoffsignal.com](mailto:techservices@soundoffsignal.com).

### PART NUMBERS:

PMP4BZL01C - 4" mpower HD Bezel – Chrome

PMP4BZL01B - 4" mpower HD Bezel – Black

PMP4BZL01P - 4" mpower HD Bezel – Primed

### INSTALLATION:

#### Stud Mount (Figure 1)

1. Pre-drill per stud mount pattern indicated in FIG.3.
2. Clean the surface, as required.
3. Deburr hole, as required.
4. Feed wires through the bezel and the gasket.
5. Make wire connections and feed wire through the drilled wire hole.
6. Install light, inserting 2 studs into the 2 drilled holes.
7. Install 2 lock nuts onto studs behind mount surface. After the nut makes full contact with the mounting surface, hand tighten 1/8th turn (torque no more than 15 in-lbs.)



**DO NOT USE POWER  
TOOLS TO TIGHTEN**

**SoundOff  
Signal**

1.800.338.7337 / [www.soundoffsignal.com](http://www.soundoffsignal.com)

SUPERIOR CUSTOMER RELATIONSHIPS. SMARTLY DESIGNED LIGHTING & ELECTRONIC SOLUTIONS.



## PMP4BZLXXX

Double-Stack Bezel for mpower® 4" HD Lights

FIG. 1


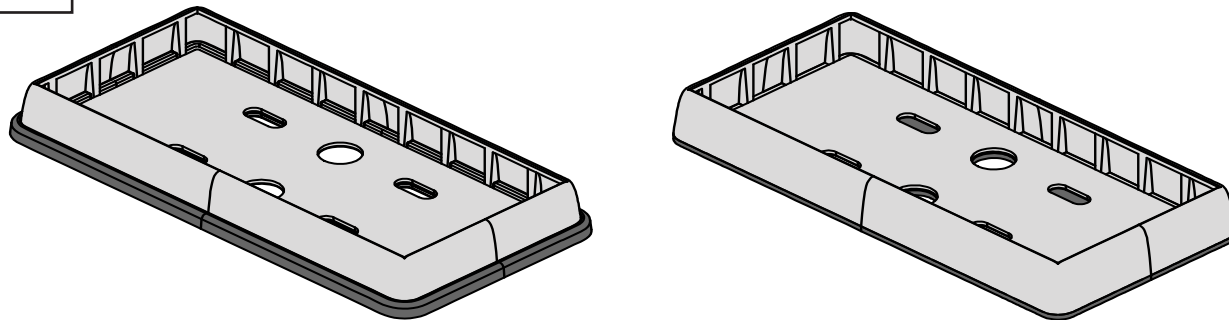


FIG. 2

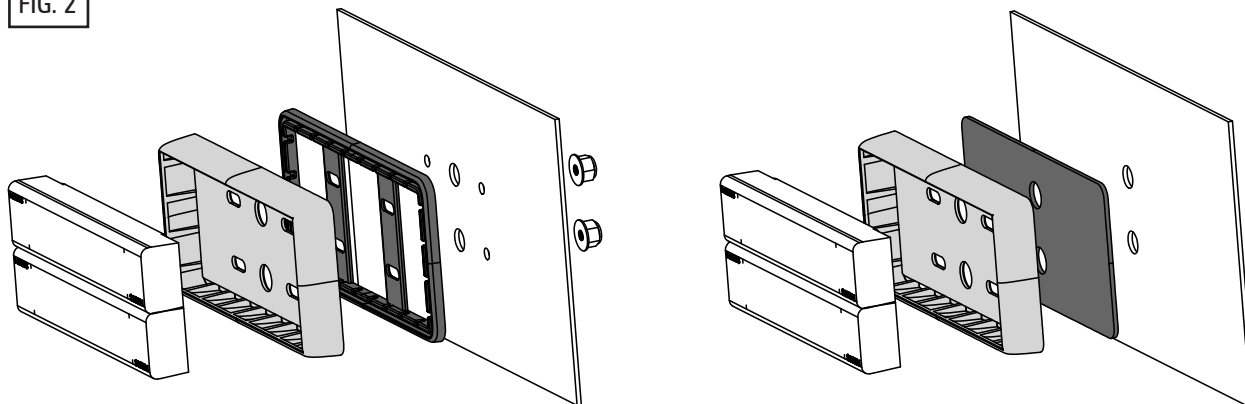

PMP4BZL03X

PMP4BZL04X

### NOTICE:

Installers and users must comply with all applicable federal, state and local laws regarding use and installation of warning devices.

*Improper use or installation may void warranty coverage.*

To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product, visit our website at [www.soundoffsignal.com/tech-services/returns/](http://www.soundoffsignal.com/tech-services/returns/). If you have questions regarding this product, contact **Technical Services**, Monday - Friday, 8 a.m. to 5 p.m. or after hours 5 p.m. to 8 p.m. ET at **1.800.338.7337** (press #4).

Questions or comments that do not require immediate attention may be emailed to [techservices@soundoffsignal.com](mailto:techservices@soundoffsignal.com).

### PART NUMBERS:

PMP4BZL03C – 4" mpower HD Double-Stack, Stud Mount Bezel – Chrome

PMP4BZL03B – 4" mpower HD Double-Stack, Stud Mount Bezel – Black

PMP4BZL03P – 4" mpower HD Double-Stack, Stud Mount Bezel – Primed

PMP4BZL04C – 4" mpower HD Double-Stack, Adhesive Mount Bezel – Chrome

PMP4BZL04B – 4" mpower HD Double-Stack, Adhesive Mount Bezel – Black

PMP4BZL04P – 4" mpower HD Double-Stack, Adhesive Mount Bezel – Primed

### INSTALLATION:

#### Stud Mount

1. Pre-drill per stud mount pattern indicated in Fig. 3.
2. Clean the surface, as required.
3. Deburr the holes, as required.
4. Feed wires through the bezel and the gasket.
5. Make wire connections and feed wires through the drilled wire holes.
6. Install lights (2), inserting studs into the drilled holes.
7. Install lock nuts (4) onto studs behind mount surface. After the nut makes full contact with the mounting surface, hand tighten 1/8th turn (torque no more than 15 in-lbs).



**DO NOT USE POWER TOOLS TO TIGHTEN**

**SoundOff  
Signal**

1.800.338.7337 / [www.soundoffsignal.com](http://www.soundoffsignal.com)


SUPERIOR CUSTOMER RELATIONSHIPS. SMARTLY DESIGNED LIGHTING & ELECTRONIC SOLUTIONS.



## PMP4BZLXXX

Double-Stack Bezel for mpower® 4" HD Lights

FIG. 3

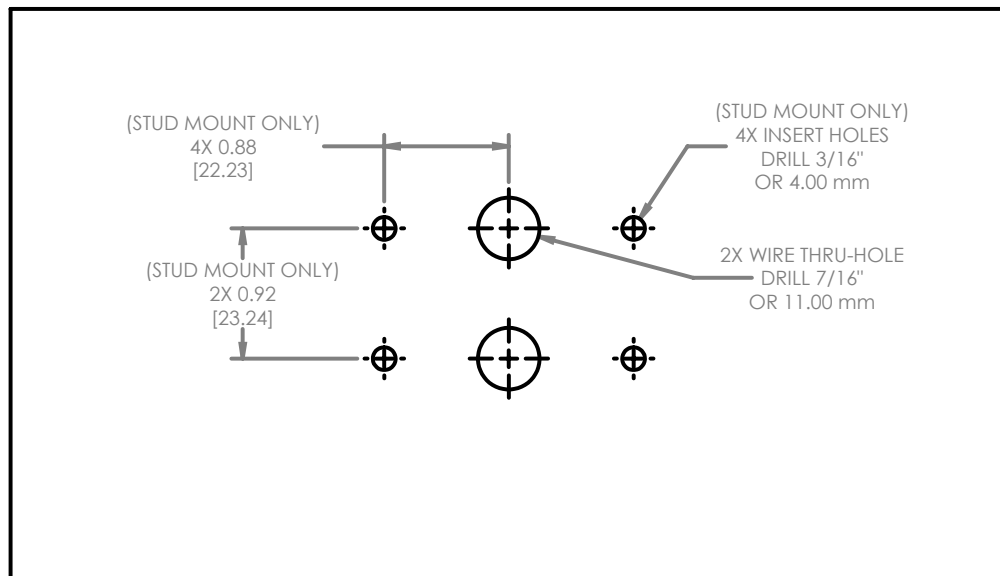

### INSTALLATION CONTINUED:

#### Adhesive Mount

1. Pre-drill wire thru-hole per pattern indicated in Fig. 3.
2. Clean the surface, as required.
3. Deburr the holes, as required.
4. Cleanse the rear surface of the bezel using the provided alcohol wipe. Install the provided adhesive onto the rear surface of the bezel.
5. Feed wires through the holes in the bezel and the adhesive.
6. Make wire connections and feed wires through the drilled wire holes.
7. Install lights (2), cleansing the inside surface of the bezel using the provided alcohol wipe and pressing in the quick-mount lights.
8. Install the bezel assembly onto the intended mount surface. Cleanse the surface using the provided alcohol wipe and while applying pressure, press the assembly onto the surface.



**DO NOT USE POWER  
TOOLS TO TIGHTEN**

#### NOTICE:

Installers and users must comply with all applicable federal, state and local laws regarding use and installation of warning devices.

*Improper use or installation may void warranty coverage.*

To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product, visit our website at [www.soundoffsignal.com/tech-services/returns/](http://www.soundoffsignal.com/tech-services/returns/). If you have questions regarding this product, contact **Technical Services**, Monday - Friday, 8 a.m. to 5 p.m. or after hours 5 p.m. to 8 p.m. ET at **1.800.338.7337** (press #4). Questions or comments that do not require immediate attention may be emailed to [techservices@soundoffsignal.com](mailto:techservices@soundoffsignal.com).

**SoundOff  
Signal**

1.800.338.7337 / [www.soundoffsignal.com](http://www.soundoffsignal.com)

SUPERIOR CUSTOMER RELATIONSHIPS. SMARTLY DESIGNED LIGHTING & ELECTRONIC SOLUTIONS.