


**Setting Light-bar Length: (Length comes preset from factory)**

**\*\* NOTE: Entering this configuration mode, will reset the light-bar to factory defaults**

- a. Set Switch #1 and Switch #2 on Breakout box to down position
- b. Momentarily apply voltage to pattern select wire to change the length of the light-bar configuration
  - a. 24" Red LED OFF, Green LED OFF
  - b. 36" Red LED OFF, Green LED Flashes 1 Time
  - c. 42" Red LED OFF, Green LED Flashes 2 Times
  - d. 48" Red LED OFF, Green LED Flashes 3 Times
  - e. 54" Red LED ON, Green LED OFF
  - f. 60" Red LED ON, Green LED Flashes 1 Time
  - g. 72" Red LED ON, Green LED Flashes 2 Times
  - c. Repeat step 'b' until correct light-bar length is selected
  - d. Set Switch #1 and Switch #2 on Breakout box to Up position to store light-bar length

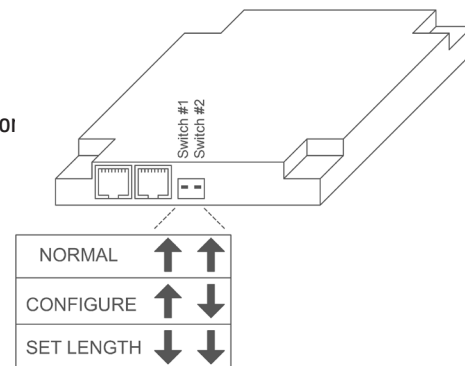

**NOTE: For settings above, Switch #2 does not need to be moved to the up position after each configuration. The switch can remain in the down position until the lightbar is completely configured and then moved to the Up position to store all the settings.**

**IMPORTANT INFORMATION:**

Warning devices are strictly regulated and governed by Federal, State and Municipal ordinances. These devices shall be used ONLY on approved vehicles. It is the sole responsibility of the user of these devices to ensure compliance.

To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product, visit our website at [www.soundoffsignal.com/sales-support](http://www.soundoffsignal.com/sales-support).  
If you have questions regarding this product, contact **Technical Services**, Monday - Friday, 8 a.m. to 5 p.m. at **1.800338.7337** (press #4 to skip the automated message).  
Questions or comments that do not require immediate attention may be emailed to [techservices@soundoffsignal.com](mailto:techservices@soundoffsignal.com).